

hanzal Company for manufacturing electric steam machines was established in 2001 in Syria and then moved to Istanbul to pursue its progress. In its short history, the company has grown steadily to meet the continuous increased demand for the company's services.

WWW.HANZALMACHINE.COM

مرجل بخار كوي سعة ٥ - ٣,٥ لتر 3.5 - 5 LITER MINI STEAM BOILER IRON 3.5 - 5 LITRE MINI KAZANLI ÜTÜ

- TEAM PRESSURE INDICATOR
- SAFETY SYSTEM PRESSURE OF %100 SAFE
- (NO WATER) WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- SPACE-SAVING ERGONOMIC DESIGN
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HRP
- ELECTRIC POWER: 220V & 380V
- HOLD TIME: 6.5 HOURS
- STEAM GENERATION: 5 KG / H
- OPERATING PRESSURE: 3 BAR
- RESISTANCE POWER: 1250 KW
- DIMENSIONS: 25 X 35 X 24 CM.
- WEIGHT: 12.9 KG





مرجل بخار كوي سعة ه لتر صناعي 5 LITER MINI STEAM BOILER IRON 5 LITRE MINI KAZANLI ÜTÜ

- STEAM PRESSURE INDICATOR
- SAFETY SYSTEM PRESSURE OF %100 SAFE
- (NO WATER)WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- SPACE-SAVING ERGONOMIC DESIGN
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HRP
- ELECTRIC POWER: 220V & 380V
- HOLD TIME: 6.5 HOURS
- STEAM GENERATION: 5 KG/H
- WORKING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- DIMENSIONS: 38 X 37 X 51 CM
- WEIGHT: 19 KG

مرجل بخار کوي سعة١٠ لتر صناعي

10 LITER MINI STEAM BOILER IRON 10 LITRE MINI KAZANLI ÜTÜ

- STEAM PRESSURE INDICATOR
- SAFETY SYSTEM PRESSURE OF %100 SARTEL
- (NO WATER) WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- SPACE-SAVING ERGONOMIC DESIGN
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HRP
- ELECTRIC POWER: 220V & 380V
- HOLD TIME: 6.5 HOURS
- STEAM GENERATION: 5 KG / H
- WORKING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- DIMENSIONS: 38 X 37 X 51 CM
- WEIGHT: 19 KGT





جهاز بخار للكوي مخرج واحد تعبئة يدوية سعة ١٠ لتر 10 LITER SINGLE STEAM BOILER MANUAL TEK ÜTÜLÜ 10 LT. BUHARLI ÜTÜ KAZANI MANUAL

- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- STEAM PRESSURE INDICATOR
- SWITCH %100 OF THE PRESSURE SAFETY SYSTEM
- WHEEL SYSTEM ALLOWS EASE OF TRANSPORT
- (NO WATER) WARNING LIGHT
- HEATER INDICATOR
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HR-
- ELECTRIC POWER : 220V & 380V
- STEAM PRODUCTION: 6.5 KG/H
- WORKING PRESSURE: 3.2 BAR

جهاز بخار للكوي مخرج واحد تعبئة اتوماتيك سعة ١٠ لتر SINGLE 10 LITER AUTOMATIC IRONING STEAM BOILER 10 LITRE TEKLI OTOMATİK BUHAR KAZANI

- AUTOMATIC WATER SUPPLY PUMP
- STEAM PRESSURE INDICATOR
- SWITCH %100 OF THE PRESSURE SAFETY SYSTEM
- WHEEL SYSTEM ALLOWS EASE OF TRANSPORT
- WATER DRAIN VALVE
- HEATER INDICATOR
- STEAM TANK: CORROSION AND WEAR RESISTANT SPECIAL ALLOY HRP
- AN IRONING BOARD IS CAPABLE OF RUNNING.
- ELECTRIC POWER: 220V & 380V
- STEAM PRODUCTION: 6.5 KG/H
- WORKING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- PUMP POWER: 0.37 KW
- RESISTANCE POWER: 5 KW





الة تنظيف المجوهرات بالبخار اوتوماتيك كامل مقاوم للصدأ مزدوج JEWELRY CLEANING MACHINE - DOUBLE OUTPUT-FULLY AUTOMATIC STAINLESS TAM OTOMATIK ÇIFT BAŞLIKLI İSTIM MAKINASI

- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- AUTOMATIC WATER SUPPLY PUMP
- 6 ATU PRESSURE DRY STEAM IN 5 MINUTES
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH GIVES %100 SAFE STEAM PRESSURE SYSTEM
- WHEELS FOR EASY TRANSPORT
- (NO WATER) WARNING LIGHT
 WATER DRAIN VALVE
- HEATER INDICATOR
- ELECTRONIC PEDALS
- CORROSION AND WEAR RESISTANT 304 STAINLESS
- STEEL STEAM TANK CRNI
- ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 9.75 KG / H
- WORKING PRESSURE: 6 BAR
- RESISTANCE POWER: 7,5 KW
- DIMENSIONS: 50 X 55 X 66 CM.
- WEIGHT: 39,750 KG.

مرجل بخار اتوماتیکی بالکامل مخرجین FULL AUTOMATIC DOUBLE OUTPUT STEAM BOILER FUL OTOMATIK İKI ÇIKIŞLI BUHAR KAZANI

- POSSIBILITY OF 24 HOURS CONTINUOUS OPERATION
- AUTOMATIC WATER SUPPLY PUMP
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH %100 PRESSURE SAFETY SYSTEM
- WHEEL SYSTEM ALLOWS EASE OF TRANSPORT
- (NO WATER) WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HRP
- CAPABILITY OF RUNNING TWO BOARD AT THE SAME TIME
- UNDER PRESSING IRONING AND CAN BE USED SAFELY IN
- ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 9.75 KG/H
- WORKING PRESSURE: 3.2 BAR
- HEATER POWER: 7.5 KW
- PUMP POWER : 0.37 KW
- DIMENSIONS:51X51X99CM
- WEIGHT: 46 KG





MODEL: 0H3577

مرجل بخاري أوتوماتيك ثلاث مخارج FULL AUTOMATIC TRIPLE OUTPUT STEAM BOILER FUL OTOMATIK ÜÇ ÇIKIŞLI BUHAR KAZANI

- THE OPPORTUNITY TO WORK 24 HOURS CONTINUALLY
- AUTOMATIC WATER SUPPLY PUMP
- STEAM PRESSURR E INDICATO
- SAFETY SWITCH %100 PRESSURE SAFETY SYSTEM
- WHEEL SYSTEM ALLOWS EASY TRANSPORT
- (NO WATER) WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY
- STEAM TANK HRP
- CAPABILITY OF RUNNING THREE BOARD
- SAFELY TO USED
- ELECTRIC POWER: 220V & 380V
- STEAM PRODUCTION: 13 KG/H
- WORKING PRESSURE: 3.5 BAR
- RESISTANCE POWER: 10 KW
- PUMP POWER: 0.75 KW
- DIMENSIONS: 55 X 56 X 102 CM
- WEIGHT: 57 KG

مرجل بخاري أتوماتيكي أربع مخارج FULL AUTOMATIC FOUR OUTPUT STEAM BOILER FUL OTOMATIK DÖRT ÇIKIŞLI BUHAR KAZANI

- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- AUTOMATIC WATER SUPPLY PUMP
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH %100 PRESSURE SAFETY SYSTEM
- WHEEL SYSTEM ALLOWS EASY OF TRANSPORT
- (NO WATER)WARNING LIGHT
- WATER DRAIN VALVE
- HEATER INDICATOR
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY STEAM TANK HRP
- CAPABILITY OF RUNNING FOUR IRONING BOARDS.
- SAFE TO USED.
- ELECTRIC POWER: 220V & 380V
- STEAM PRODUCTION: 26 KG / H
- WORKING PRESSURE: 3.5 BAR
- RESISTANCE POWER: 15 KW
- PUMP POWER : 0.75 KW
- DIMENSIONS: 55 X 102 CM X56
- WEIGHT: 64 KG





مرجل بخار مرکزي باستطاعة ٤٠ كيلو واط 40 KW CENTRAL SYSTEM STEAM GENERATOR 40 KW MERKEZI SISTEM BUHAR KAZANI

- STEAM PRESSURE INDICATOR
- SAFETY SWITCH %100 SAFE PRESSURE SYSTEM
- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- AUTOMATIC WATER SUPPLY PUMP
- HAZARD WARNING LIGHTS IN CASE OF FAILURE
- WHEEL SYSTEM ALLOWS EASY OF TRANSPORT
- CORROSION AND WEAR RESISTANT
- HAS THE CAPACITY TO RUN 33 IRONING BOARDS
- WATER DRAIN VALVE
- DUAL STEAM DISCHARGE
- RESISTANCE SEPARATOR BUTTONS
- HEATER INDICATOR
- ELECTRIC POWER: 380V
- TANK THICKNESS: 5 MM
- STEAM PRODUCTION: 104 KG / H
- WORKING PRESSURE: 4 BAR
- STEAM TANK: 226 LITERS
- RESISTANCE POWER: 20-30-40 KW
- PUMP POWER: 0.75 KW
- DIMENSIONS: 90 X 92 X 121 CM
- WEIGHT: 142 KG

مرجل بخار مرکزي باستطاعة ۲۰ کیلوواط 60 KW CENTRAL SYSTEM STEAM GENERATOR 60 KW MERKEZI SISTEM BUHAR KAZANI

- STEAM PRESSURE INDICATOR
- SAFETY SWITCH %100 SAFE PRESSURE SYSTEM
- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- AUTOMATIC WATER SUPPLY PUMP
- HAZARD WARNING LIGHTS IN CASE OF FAILURE
- WATER DRAIN VALVE
- DUAL STEAM DISCHARGE
- HEATER INDICATOR
- RESISTANCE SEPARATOR BUTTONS
- WHEEL SYSTEM ALLOWS EASY OF TRANSPORT
- CORROSION AND WEAR RESISTANT
- HAS THE CAPACITY TO RUN 25 IRONING BOARDS
- ELECTRIC POWER: 380V
- TANK THICKNESS: 5 MM
- STEAM PRODUCTION: 78 KG / H
- WORKING PRESSURE: 4 BAR
- STEAM TANK: 189.9 LITERS
- RESISTANCE POWER: 50-60-80 KW
- PUMP POWER: 0.75 KW
- DIMENSIONS: 90 X 80 X 117 CM
- WEIGHT: 126 KG





مرجل بخار يعمل على الغاز الطبيعي NATURAL GAS STEAM BOILERS DOĞALGAZLI BUHAR KAZANLARI

- STEAM PRESSURE INDICATOR
- THE OPPORTUNITY TO WORK WITH THE TUBE
- SAFETY SWITCH GIVES %100 SAFETY PRESSURE SYSTEM
- THE OPPORTUNITY TO WORK 24 HOURS IN A ROW
- AUTOMATIC WATER SUPPLY PUMP
- FAILURE SIREN AND HAZARD WARNING LIGHTS
- GAS VALVE GAS LEAKAGE
- WATER DRAIN VALVE
- DUAL STEAM DISCHARGE
- 304 QUALITY STAINLESS PIPES
- CORROSION AND WEAR RESISTANT 304 QUALITY CRNI STAINLESS STEEL STEAM TANK
- 120 KG / 150 KG AND 180 KG ARE INCLUDING OTHER VARIETIES
- WORK WITH GAS TANKS OR CONTINUES GAS
- ELECTRIC POWER: 220V & 380V
- STEAM GENARATION: 80 KG / H
- OPERATING PRESSURE: 4 BAR
- PUMP POWER: 0.75 KW
- STEAM TANK : 273 LITER
- DIMENSIONS: 84 X 84 X 117 CM
- WEIGHT: 224 KG.



طاولة كي ضيقة مزودة بمرجل بخار داخلي ١٠ لتر تعبئة يدوية 10 LITER MANUAL NARROW TYPE VACUUM IRONING BOARD 10 LITER MANUAL DAR PASKALA ÜTÜ

- 1.5 MM TOP SHEET TRAY THICKNESS
- CASING FAN GIVES STRONG VACUUMING SYSTEM
- TABLE HEATER INDICATOR
- TEMPERATURE SETTING TABLE 300 50 °C
- UNDER PRESSING IRONING AND SYSTEMS.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2500 M³/H
- TABLE SIZE: 24 X 40 X 117 CM
- DIMENSIONS: 48 X 141 X 108 CM
- WEIGHT: 70 KG





طاولة كي ضيقة مع زند مزودة بمرجل بخار داخلي ١٠ ليتر تعبئة يدوية 10 LITER NARROW TYPE IRONING BBOARD WITH APPARATUS HAND 10 LITER MANUAL KENDINDEN KAZANLI KOL VAKUMLU DAR PASKALA ÜTÜ

- 1.5 MM THICK PERFORATED SHEET TOP TRAY
- CASING FAN STRONG VACUUM SYSTEM
- TABLE HEATER INDICATOR
- TEMPERATURE SETTING TABLE 300 * 50 ° C
- LEVER HANDLES BETTER PRODUCTS THROUGH APPARATUS
- 90 DEGREE SWIVEL ARM VACUUM APPARATUS (HEATING CAN BE ADDED UPON REQUEST)
- UNDER PRESSING IRONING AND
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.55 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2500 M³/H
- TABLE SIZE: 24 X 40 X 117 CM
- DIMENSIONS: 48 X 141 X 108 CM
- WEIGHT: 75 KG

طاولة كي ضيقة اتوماتك NARROW TYPE VACUUM IRONING BOARD KENDINDEN KAZANLI DAR PASKALA ÜTÜ

- 1.5 MM TOP SHEET TRAY THICKNESS
- CASING FAN GIVES STRONG VACUUMING SYSTEM
- TABLE HEATER INDICATOR
- TEMPERATURE SETTING TABLE 300 50 °C
- UNDER PRESSING IRONING AND SYSTEMS.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.55 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2500 M³/H
- TABLE SIZE: 24 X 36 X 117 CM
- DIMENSIONS: 48 X 141 X 108 CM
- WEIGHT: 80 KG





طاولة كي اتوماتك نوع ضيق مزودة بمرجل داخلي وزند INTERNAL BOILER NARROW TYPE VACUUM IRONING BOARD KENDINDEN KAZANLI KOL APARATLI DAR PASKALA ÜTÜ

- THE OPPORTUNITY TO WORK 24 HOURS A DAY
- AUTOMATIC WATER SUPPLY PUMP
- 1.5MM THICK PERFORATED SHEET TOP TRAY
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH GIVES %100 SAFE PRESSURE SYSTEM
- STEAM AND WATER DRAIN VALVE
- HEATER INDICATOR
- (NO WATER) WARNING LIGHT
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY
- STEAM TANK HRP
- ▶ ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 6.5 KG / H
- OPERATING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- PUMP POWER: 0.37 KW
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS: 46 X50 1 X 108 CM.
- WEİGHT: 80 KG.

طاولة كي اتوماتك نوع ضيق مزودة بمرجل داخلي INTERNAL BOILER NARROW TYPE VACUUM IRONING BOARD KENDINDEN KAZANLI DAR PASKALA ÜTÜ

- THE OPPORTUNITY TO WORK 24 HOURS A DAY
- AUTOMATIC WATER SUPPLY PUMP
- 1.5MM THICK PERFORATED SHEET TOP TRAY
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH GIVES %100 SAFE PRESSURE SYSTEM
- STEAM AND WATER DRAIN VALVE
- HEATER INDICATOR
- (NO WATER) WARNING LIGHT
- CORROSION AND WEAR RESISTANT SPECIAL ALLOY
- STEAM TANK HRP
- ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 6.5 KG / H
- OPERATING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- PUMP POWER: 0.37 KW
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS: 46 X50 1 X 108 CM.
- WEİGHT: 85 KG.





طاولة كي اتوماتيك مع زند و لمبة ومرجل داخلي INTERNAL BOILER NARROW TYPE VACUUM (IRONING BOARD(FULL OPTION) KENDINDEN KAZANLI KOL APARATLI DAR PASKALA ÜTÜ

- ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 6.5 KG / H
- OPERATING PRESSURE: 3.2 BAR
- RESISTANCE POWER: 5 KW
- PUMP POWER: 0.37 KW
- VACUUM MOTOR: 0.37 KW
- TABLAISITICI: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS: 170 X 55 X 130 CM.
- WEIGHT: 90 KG.
- THE OPPORTUNITY TO WORK 24 HOURS A DAY
- AUTOMATIC WATER SUPPLY PUMP
- 1.5MM THICK PERFORATED SHEET TOP TRAY
- HEATED VACUUM ARM BRACKET
- ADJUSTABLE RAIL BALANCER IRON REMOVAL SYSTEM
- STEAM PRESSURE INDICATOR
- SAFETY SWITCH GIVES %100 SAFE
- PRESSURE SYSTEM
- STEAM AND WATER DRAIN VALVE
- VACUUM THE FLOOR TO AIR FLUE SYSTEM
- HEATER INDICATOR
- (NO WATER) WARNING LIGHT
- CORROSION AND WEAR RESISTANT SPECIAL
- ALLOY STEAM TANK HRP
- STRONG VACUUM SYSTEM
- PLATE TEMPERATURE SETTING
- BETWEEN 300 * 50C
- WHEEL SYSTEM ALLOWS EASE OF TRANSPORT
- WATER SPRAY UNIT
- ADJUSTABLE ILLUMINATION SYSTEM
- AN ANTI-GLARE BLOWING ASPIRATOR

طاولة كي ضيقة فل اتوماتيك مع لمبة و فرد تنظيف و زند . مخرجين NARROW TYPE VACUUM IRONING BOARD WITH APPARATUS HAND EMMELI – ÜFLEMELI KOL APARATLI BACALI LAMBALI DAR PASKALA ÜTÜ

- USUALLY DESIGNED FOR DRY CLEANING.
- **THE VACUUM AIR IS VENTED TO THE GROUND AND DOES**
- NOT REMOVE THE DIRT.
- WITH BALANCER YOU CAN MAKE YOUR ARM TIRELESS AND
- COMFORTABLE IRONING.
- WORKTOP, HEATING, VACUUM AND BLOWER IS EQUIPPED
- WITH THE FEATURE.
- THANKS TO THE ARM APPARATUS SUCH AS COAT SLEEVE
- PROVIDES BETTER IRONING.
- FEATURES
- ELECTRIC POWER: 380V
- VACUUM MOTOR: 2 X 0,37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS E.B.Y.: 139 X 41 X 92 CM
- CHIMNEY AND LAMP Y.Ö.: 108 CM. (DISMANTLED IS.)
- WEIGHT: 100 KG





طاولة كي عريضة اتوماتيك مرجل داخلي INTERNAL BOILER WIDE TYPE VACUUM IRONING BOARD KENDINDEN KAZANLI VAKUMLU GENIŞ PASKALA ÜTÜ

- UNDER PRESSING CLOTHES FACTORY IRONING SYSTEMS.
- THERE IS A VACUUM AND HEATING CAPABILITY.
- THANKS TO THE ARM APPARATUS SUCH AS COAT SLEEVE PROVIDES BETTER IRONING.
- IF DESIRED, HEATING MAY BE ADDED TO THE ARM APPARATUS.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER 3 KW
- VACUUM FLOW: 2200 M³/H
- TABLE LENGTH: 75.2 X 112 CM
- DIMENSIONS: 140 X 78 X 92 CM
- WEIGHT: 85 KG

طاولة الكوي ـ نوع ضيق مزودة بجهاز شفط NARROW TYPE VACUUM IRONING BOARD VAKUMLU DAR PASKALA ÜTÜ

- 1.5 MM TOP SHEET TRAY THICKNESS
- CASING FAN GIVES STRONG VACUUMING SYSTEM
- TABLE HEATER INDICATOR
- TEMPERATURE SETTING TABLE 300 50 ° C
- UNDER PRESSING IRONING AND SYSTEMS.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.55 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2500 M³/H
- TABLE SIZE: 24 X 36 X 117 CM
- DIMENSIONS: 48 X 141 X 108 CM
- HOLD AREA: 24 X 36 X 117 CM
- WEIGHT: 46 KG





طاولة كيّ من النوع الضيّق مزودة بذراع مساعدة NARROW TYPE VACUUM IRONING BBOARD WITH APPARATUS HAND VAKUMLU KOL APARATLI DAR PASKALA ÜTÜ

- 1.5 MM THICK PERFORATED SHEET TOP TRAY
- CASING FAN STRONG VACUUM SYSTEM
- TABLE HEATER INDICATOR
- TEMPERATURE SETTING TABLE 300 * 50 ° C
- LEVER HANDLES BETTER PRODUCTS THROUGH APPARATUS
- 90 DEGREE SWIVEL ARM VACUUM APPARATUS (HEATING CAN BE ADDED UPON REQUEST)
- UNDER PRESSING IRONING AND
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.55 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2500 M³/H
- TABLE SIZE: 24 X 36 X 117 CM
- DIMENSIONS: 48 X 141 X 108 CM
- WEIGHT: 46.7 KG

طاولة كوي عريضة مزودة بنظام شفط WIDE VACUUM IRONING BOARD VAKUMLU GENIŞ MASA PASKALA

- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER 3 KW
- VACUUM FLOW: 2200 M³/H
- TABLE DIMENSIONS: 72.5 X 112 CM
- E.B.Y DIMENSIONS: 140 X 78 X 90 CM
- WEIGHT: 45 KG





طاولة الكيّ العريضة مع مدخنة WIDE VACUUM IRONING BOARD VAKUMLU BACALI GENIŞ ÜTÜ MASASI

- UNDER PRESSING FACTORIES IRONING SYSTEMS.
- ON THE TOP, THERE IS A VACUUM AND HEATING CAPABILITY.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER 3 KW
- VACUUM FLOW: 2200 M³/H
- TABLE DIMENSIONS: 72.5 X 112 CM
- DIMENSIONS: 140 X 78 X 90 CM
- WEIGHT: 50 KG

طاولة كي عريضة عادية مع زند ولمبة WIDE VACUUM IRONING BOARD FULL OPTION VAKUMLU FUL SISTEM GENIŞ ÜTÜ MASASI

- UNDER PRESSING IRONING AND SYSTEMS.
- ON THE TOP, THERE IS A VACUUM AND HEATING CAPABILITY.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER :3 KW
- VACUUM FLOW: 2200 M³/H
- TABLE DIMENSIONS: 72.5 X 112 CM
- DIMENSIONS: 140 X 78 X 90 CM
- WEIGHT: 65 KG





طاولة كي ضيقة مع سخان مزودة بجهاز شفط ومكان للخزان وزند NARROW TYPE VACUUM IRONING BOARD MINI BOILER -WITH APPARATUS HAND VAKUMLU KOL APARATLI DAR PASKALA MINI KOYMA YERLI

- UNDER PRESSING FACTORIES IRONING SYSTEMS.
- ON THE TOP, THERE IS A VACUUM AND HEATING CAPABILITY.
- THANKS TO THE ARM APPARATUS SUCH AS COAT SLEEVE
- PROVIDES BETTER IRONING.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS: 139 X 41 X 92 CM
- WEIGHT: 55 KG

طاولة كي ضيقة مع سخان مزودة بجهاز شفط ومكان للخزان NARROW TYPE VACUUM IRONING BOARD WITH IRON REST VAKUMLU DAR PASKALA MINI KOYMA YERLI

- UNDER PRESSING FACTORIES IRONING SYSTEMS.
- ON THE TOP, THERE IS A VACUUM AND HEATING CAPABILITY.
- THANKS TO THE ARM APPARATUS SUCH AS COAT SLEEVE
- PROVIDES BETTER IRONING.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.37 KW
- TABLE HEATER: 1.5 KW
- VACUUM FLOW: 2200 M³/H
- TABLE SIZE: 116 X 40 X 24 CM
- DIMENSIONS: 139 X 41 X 92 CM
- WEIGHT: 45 KG





















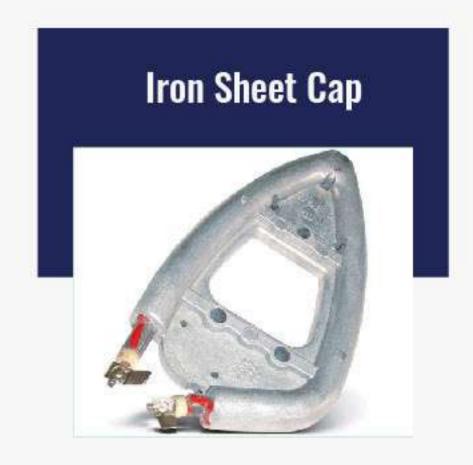

WWW.HANZALMACHINE.COM

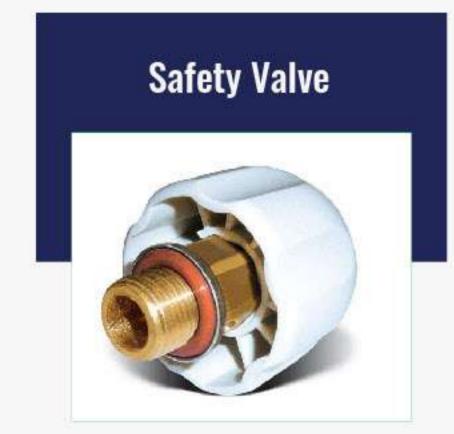

















مكبس كي مزود بخزان داخلي VACUUM IRONING PRESS INTERNAL BOILER FUL OTOMATIK KENDINDEN KAZANLI BEDEN ÜTÜ PRESI

- THE IRONING IS IN THE DESIRED FORM, AND HIGH QUALITY.
- STURDY FRAME AND ERGONOMIC TO USE.
- STRONG VACUUM (SUCTION) IS CAPABLE OF.
- WORKS WITH INDUSTRIAL ELECTRICITY, 380 V
- IN EXCESS PRESSURE SAFETY VALVE AND LIGHT ALARM SYSTEM WHICH ACTIVATE A VOICE ALARMS
- THAT GIVES %100 SAFETY USE.
- THANKS TO PUMP WATER SUPPLY SYSTEM IS AUTOMATIC.
- STEAM CAPACITY OF 15 KG / H.
- IS READY TO OPERATE IN ABOUT 35 MINUTES.
- WORKING PRESSURE IS 4 BAR.
- RESISTANCE POWER IS 2 X 7.5 KW.
- THERE ARE IRONING HAND FOR RETOUCHING WORK.
- MAKES EVACUATION OF THE LOWER MOLD, THE UPPER AND LOWER MOLD EMITS VAPOR.
- UPPER AND LOWER DIE SIZE OF 345 X 250 X 1130 MM
- CAPACITY: 60 PC/H
- ELECTRICAL POWER: 400 V
- RESISTANCE POWER: 2 X 7.5 KW
- MOTOR POWER: 0.55 KW
- PUMP POWER: 0.55 KW
- STEAM CONSUMPTION: 15 KG/S
- STEAM PRESSURE: 4 BAR
- NET WEIGHT: 376 KG
- GROSS WEIGHT: 456 KG
- NET DIMENSIONS: 150 X 120 X 133 CM
- PACKAGED DIMENSIONS: 160 X 130 X 143 CM





مكبس عادي تغذية خارجية VACUUM IRONING PRESS STANDART BOY BEDEN ÜTÜ PRESI

- THE IRONING IS IN THE DESIRED FORM, AND HIGH QUALITY.
- STURDY FRAME AND ERGONOMIC TO USE.
- IT WORKS WITH CENTRAL STEAM AND VACUUM SYSTEMS
- THE LOWER MOLD MAKES EVACUATION BUT THE UPPER AND LOWER
- MOLD EMITS VAPOR.
- CAPACITY: 35-30 PIECES/HOUR
- STEAM INLET: 1.2 "
- VACUUM INLET: 2 "
- MOTOR POWER: 0.55 KW
- STEAM CONSUMPTION: 15 KG/S
- STEAM PRESSURE: 5 BAR
- NET WEIGHT: 280 KG
- GROSS WEIGHT: 350 KG
- NET DIMENSIONS: 151 X 118 X 122 CM
- PACKAGED DIMENSIONS: 161 X 128 X 132 CM

طاولة كي تريكو مع خزان بخار داخلي KNITWEAR IRONING MACHINE INTERNAL STEAM HEATING - 100*185 CM KENDINDEN KAZANLI BUHAR ISITMALI TRIKO ÜTÜSÜ

- STEAM BOILERS ARE WITHIN.
- THERE IS NO NEED FOR AN OUTER BOILER.
- IS A FULLY AUTOMATED SYSTEM.
- EQUAL DISTRIBUTION OF STEAM IN ALL PARTS OF
- THE SURFACE OF THE TABLE.
- HIGH QUALITY COOLING WITH VACUUM FEATURE.
- APPROXIMATELY 400 PRODUCTS CAN BE IRONED DAY.
- PLATE IS HEATED WITH STEAM POWER SAVING.
- WITHIN THE PUMP SYSTEM CAN BE CONTINUOUS AND
- UNINTERRUPTED IRONING 07.24 HOURS.
- ELECTRIC POWER: 220V & 380V
- STEAM GENERATION: 39 KG / H
- OPERATING PRESSURE: 4 BAR
- RESISTANCE POWER: 30 KW
- PUMP POWER: 0.55 KW
- VACUUM MOTOR: 0.55 KW
- TABLAISITICI: 8 KW
- VACUUM FLOW: 3200 M³/H
- TABLE SIZE: 1000 X 2000 CM





مكبس طباعة حراري على الهواء ٤٠٠٥ سم PRINTING PRESS MANUAL TRANSMISSION - 50 * 440 CM TRANSFER BASKI MAKINASI

- ONE HEAD IS MANUAL SYSTEM.
- PORTABLE; CAN BE PLACED ON A DESK.
- DIGITAL THERMOSTATS PROVIDE PRECISE TEMPERATURE CONTROL.
- DIGITAL SECONDS COUNTER BY SETTING THE DESIRED
- SECONDS, AN ALARM SOUNDS AND ALERTS.
- MECHANICAL DIAL PRESSURE CAN BE ADJUSTED.
- ONE HEAD IS UPRIGHT WITH MANUAL HAND PRINTS.
- ELECTRIC POWER: 220V & 380V
- MOLD HEATER: 2.5 KW
- TABLE DIMENSIONS: 50 × 40 CM
- DIMENSIONS: 58 X 80 X 56 CM WEIGHT: 61 KG

مكبس طباعة دوار الرأس ضغط هواء - ۲۰۰۲۰ سم PRINTING PRESS ROTATING HEAD TRANSMISSION DOUBLE-PENUMATIC- 25*25CM DÖNER KAFA PNÖMATIK TRANSFER BASKI PRESI

- PNEUMATIC SYSTEM WORKS WITH AIR.
- DOUBLE MOLD FEATURE MINIMIZES WASTE OF TIME.
- WHEN A PRINT JOB CAN CREATE NEW PRESSURES ON THE OTHER MOLD.
- DIGITAL THERMOSTATS PROVIDE PRECISE TEMPERATURE CONTROL.
- DIGITAL SECONDS COUNTER, SET THE DESIRED NUMBER
 OF SECONDS, SECONDS CAN DETERMINE THE PRESSURING TIME
- HAS THE ABILITY TO PRINT SETTINGS.
 TWIN TABLE AND RIGHT AND LEFT, TAKING WITH
- AUTOMATIC VERTICAL PRINTS BY HAND.
- ELECTRIC POWER: 220V & 380V
- MOLD HEATER: 1.5 KW
- TABLE DIMENSIONS: 20 × 20 25 × 25 CM
- AIR CONSUMPTION: 7 LITERS / D
- DIMENSIONS: 50 X 50 X 58 CM
- WEIGHT: 65 KG





مكبس طباعة متحرك اتوماتك SINGLE PNEUMATIC TRANSFER PRINTING PRESS ÇIFTLI PNÖMATIK TRANSFER BASKI PRESI (50*40 CM.)

- PNEUMATIC SYSTEM WORKS WITH AIR
- DIGITAL THERMOSTATS PROVIDE PRECISE TEMPERATURE CONTROL.
- DIGITAL SECONDS COUNTER, SET THE DESIRED NUMBER
 OF SECONDS SECONDS CAN DETERMINE WHETHER
 PRESSURE IS APPLIED.
- HAS THE ABILITY TO PRINT SETTINGS
- IS A SINGLE PLATTER, VERTICAL PRINT
- ELECTRIC POWER: 220V & 380V
- MOLD HEATER: 3 KW
- TABLE DIMENSIONS: 40×40-50×40 CM
- AIR CONSUMPTION: 30 LITERS / D
- DIMENSIONS: 65 X 66 X 141 CM
- WEIGHT: 120 KG

مكبس طباعة - ضغط هوائي اتوماتيك PNEUMATIC DOUBLE TRANSFER PRINTING PRESSER PNÖMATIK ÇIFTLI TRANSFER BASKI PRESI2-

- PNEUMATIC SYSTEM WORKS WITH AIR.
- DOUBLE MOLD FEATURE MINIMIZES WASTE OF TIME.
- WHEN A PRINT JOB CAN CREATE NEW PRESSURES ON THE OTHER DIE.
- DIGITAL THERMOSTATS PROVIDE PRECISE TEMPERATURE CONTROL.
- DIGITAL SECONDS COUNTER, SET THE DESIRED NUMBER OF SECONDS, SECONDS CAN DETERMINE WHETHER PRESSURE IS APPLIED.
- MANY PRINTS ARE COUNTING SYSTEM.
- TWIN TABLE IS AUTOMATICALLY GOING RIGHT AND LEFT PRINTS.
- DOUBLE PLATE SYSTEM
- DIGITAL TEMPERATURE ADJUSTMENT
- COOLING FANS
- EMERGENCY STOP SYSTEM
- PNEUMATIC PRINT SETUP
- STAINLESS RESISTANCE
- ST 37 QUALITY SHEET
- DIGITAL TIME ALIGNMENT
- PRESSURE GAUGE
- DIGITAL COUNTER SYSTEM
- AUTOMATIC LUBRICATION OF REGULATORS
- CUSTOMIZED SIZES





طاولة تفتيح جوانب البنطال TROUSERS SIDE STEAM OPENING TABLE WITH PNEUMATIC CHAIN STRETCHING ZINCIRLI PNÖMATIK PANTOLON YAN DIKIŞ AÇMA ÜTÜ PASKALASI

- WITHOUT DAMAGING THE DELICATE STITCHING OF THE FABRIC, ALLOWS EASE OF OPENING BY STITCHING
- ADAPTS PERFECTLY TO THE SHAPE OF THE PRODUCT.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 0.55 KW
- TABLE HEATER: 1 KW
- VACUUM FLOW: 2300 M³/H
- WEIGHT: 30 KG

ماكينة تبخير الملابس FORM FNISHING MACHINE CENTRAL STEAM INPUT MONT ŞIŞIRME ÜTÜ MAKINASI

- CAN BE ADJUSTED ACCORDING TO THE TYPE OF ITEM HAS A SWELLING PROPERTY.
- STEAM AND BLOW-OFF TIME IS TIMED.
- ROVIDES A LOW COST AND HIGH EFFICIENCY IN MANUFACTURING
- SAFETY VALVE SYSTEM IS %100 SAFE.
- THANKS TO PUMP WATER SUPPLY SYSTEM IS AUTOMATIC.
- EADY TO BE OPERATED IN ABOUT 25 MINUTES.
- ABILITY TO SET THE TIME OF STEAM AND THE TIME OF AIR BLOWING RELEASING
- ELECTRICAL POWER: 380 & 220 V
- ELECTRICITY: 400 V
- CAPACITY: 100 PCS /H
- POWER: 400 V
- STEAM LOGIN: 0.75 KW
- STEAM: 1.2 "
- STEAM CONSUMPTION: 1.2 "
- AIR CONSUMPTION: 25 KG/H
- VAPOR PRESSURE: 3 L/D
- NET WEIGHT: 4 BAR
- WEIGHT: 65 KG
- NET DIMENSIONS: 100 X 48 X 176 CM
- PACKAGED DIMENSIONS: 110 X 58 X 186 CM





طاولة تجهيز الجاكيت JACKET HANDLE TABLE RUTUŞ TAKIM ELBISE METINESI

طاولة تجهيز الجاكيت JACKET HANDLE TABLE RUTUŞ TAKIM ELBISE METINESI





طاولة تجهيز الجاكيت JACKET HANDLE TABLE RUTUŞ TAKIM ELBISE METINESI

طاولة عريضة لكيّ الستائر CURTAINS IRONING BOARD VAKUMLU PERDE ÜTÜ MASASI

- OFTEN USED IN CURTAINS MANUFACTURING FACTORIES.
- ON THE TOP, THERE IS A VACUUM AND HEATING CAPABILITY.
- IRON CURTAIN HOLDER IS SEPARATE FROM THE TRAY IS NOT INSTALLED AND CAN BE IRONED EASIER.
- SECOND VACUUM MOTOR CAN BE ADDED UPON REQUEST.
- ELECTRIC POWER: 220V & 380V
- VACUUM MOTOR: 220V & 380V
- TABLE HEATER: 6 KW
- VACUUM FLOW: 2200 M³/H
- TABLE DIMENSIONS: 80 X 180 CM
- E.B.Y DIMENSIONS: 200 X 86 X 90 CM
- WEIGHT: 63 KG





ماكينة إزالة البقع STAINS REMOVAL MACHINE CABIN TYPE KABINLI LEKE ÇIKARMA MAKINASI

- HORIZONTAL TYPE STAINS MACHINES OFTEN USED IN DRY CLEANING BUSINESS.
- CENTRAL SYSTEM WORKS WITH STEAM AND AIR.
- TOP AND TRAY SYSTEM IS 304 STAINLESS.
- IT IS SELF-VACUUMING SYSTEMS.
- STAINED AREAS ARE ILLUMINATED WITH LIGHT.
- ELECTRICAL POWER: 380/220 V
- MOTOR POWER: 0.55 KW
- STEAM LOGIN: 1.2 "
- STEAM: 1.2 "
- AIR INLET: 1.2 "
- NET WEIGHT: 77 KG
- NET DIMENSIONS: 70 X 80 X 137 CM



